



Switches


Standard CTI Switches




CTI Pushbutton Switches



Circuit Diagram



Panel Cutout Dimensions




CTI Part # **32-P-010261-01** SPDT - mom (SP)


Technical Data

Cycles: **10,000,000**
 Current Rating: **5 amps@120 vAC, 30vDC**
 Temperature Range: **-40°C to +85° @ Rated Current**
 Internal Seals: **Internal Offset Seals**


Spring Rate: **6.9 lbs**
 Environmental Protection: **IP40, IP67**
 Wire Leads: **None**
 Terminals: **None**



Circuit Diagram



Panel Cutout Dimensions




CTI Part # **32-P4-20002-01** 2-SPDT - mom


Technical Data

Rating: **5 amps@120 vAC**
 Rating: **3 amps Inductive@ 28 vDC**
 Temperature Range: **-40°C to +85° @ Rated Current**


Spring Rate Level1: **1.75 lbs**
 Spring Rate Level2: **1.75 lbs**
 Button: **Red Nylon**



Circuit Diagram

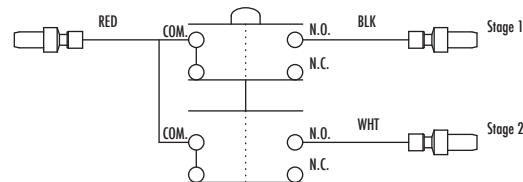

Panel Cutout Dimensions



CTI Part # **32-P4-20002-02** 2-SPDT - mom (w/leads)

Technical Data

Rating: **5 amps@120 vAC**
 Rating: **3 amps Inductive@ 28 vDC**
 Temperature Range: **-40°C to +85° @ Rated Current**

Spring Rate Level1: **1.75 lbs**
 Spring Rate Level2: **1.75 lbs**
 Button: **Red Nylon**
 Terminals: **Male Bullet 22-16, 0.156**

www.cyber-tech.net

1-800-621-8754

